




## Antivibratory supports for low frequencies



Silentac 200 is an antivibratory support designed for making floating floors and machinery supports and others elements vibratory based on rubber NR + SBR and cork with excellent anti vibration and insulating properties.

## Properties

Colour	Black with brown points.
Rubber	NR + SBR
Density	625 kg/m <sup>3</sup> ± 2 %
Load limits	0.7 – 2.2 kg/cm <sup>2</sup>
Load work	1 ± 0,1 kg/cm <sup>2</sup>
Load max.	2,5 kg/cm <sup>2</sup>
Resonance frequencies	5 – 12 Hz.

Standard types	Measures in mm
Silentac 200	60 x 60 x 20 – 30 – 40 – 50 - 60
Silentac 200	80 x 80 x 20 – 30 – 40 – 50 - 60
Silentac 200	100 x 100 x 20 – 30 – 40 – 50 - 60
<i>On request, any other measures</i>	

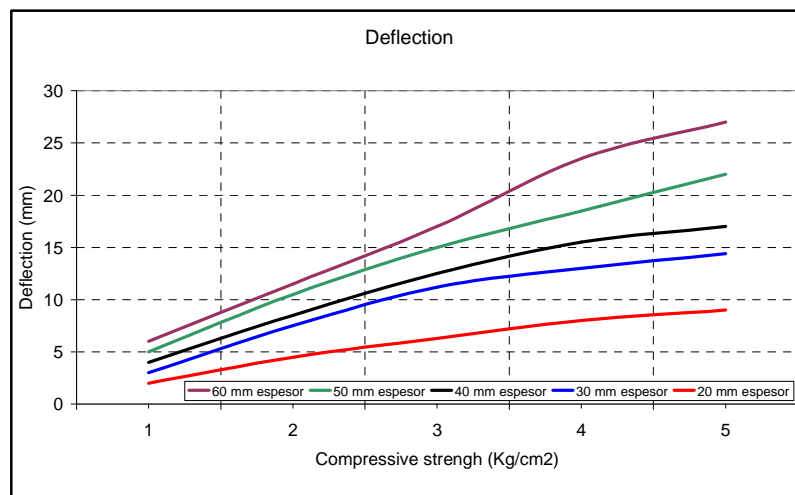

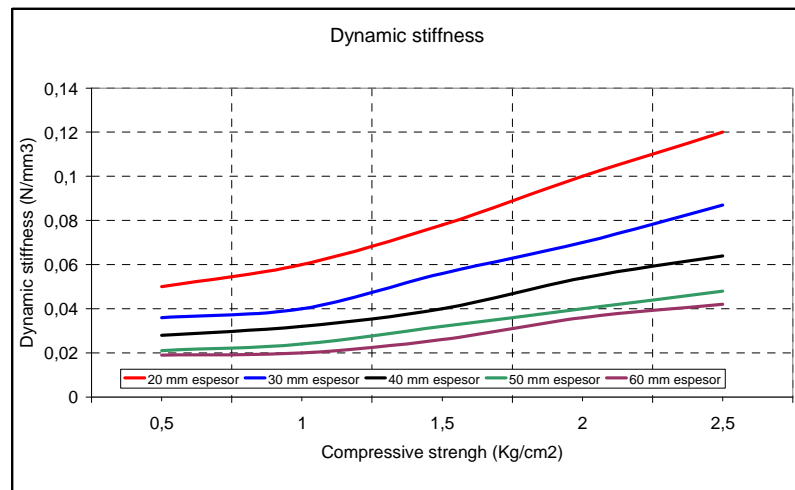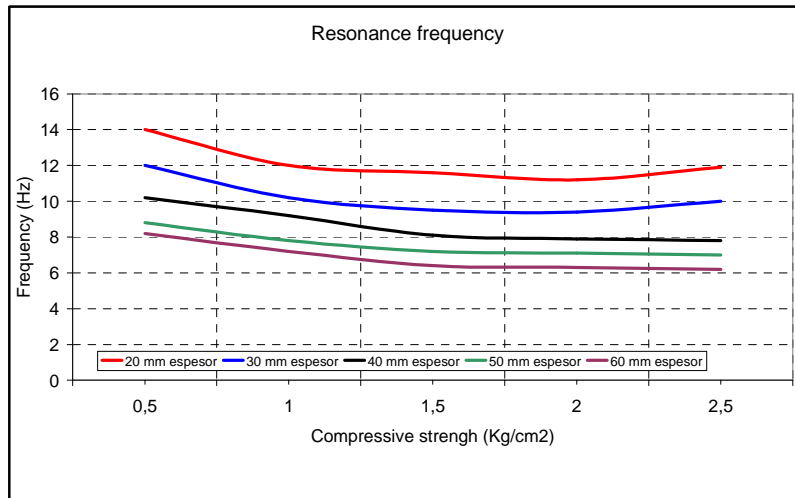

Information in this document and otherwise supplied to users is based on our general experiences and is given in good faith but, because of particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or implied with respect to such information. Specifications are subject to change without notice.

**CROXON, S. L.**

Polig. Ind. Majoravique, 27 B  
 41309 La Rinconada (Sevilla)  
 Telf.: +34 954 904 225  
 Fax: +34 954 906 676  
 E-mail: [croxon@croxon.es](mailto:croxon@croxon.es)  
 Web: [www.croxon.es](http://www.croxon.es)