




## CHARACTERISTICS



**CROXON VIBRO** is a recycled EPDM rubber used-not used in a compact and microcelular for many applications in civil and industrial engineering.

Due to its high density, flexibility and cell interstices, it provides excellent properties such as energy absorbing and antidamping.

## SPECIFICATIONS

Material	Recycled EPDM and PUR
Hardness	44 Shore A.
Density	1.700 kg/m <sup>3</sup> ± 10 %.
Elongation at break	65 %
Static stiffness	0,07 N/mm <sup>2</sup>
Dynamic stiffness	0,13 N/mm <sup>2</sup> .
Reaction to fire	B2.
Water absorption	7 %.
Thermal conductivity	0,07 W/m × k.
Performance	20 x 1000 x 1200 mm sheets

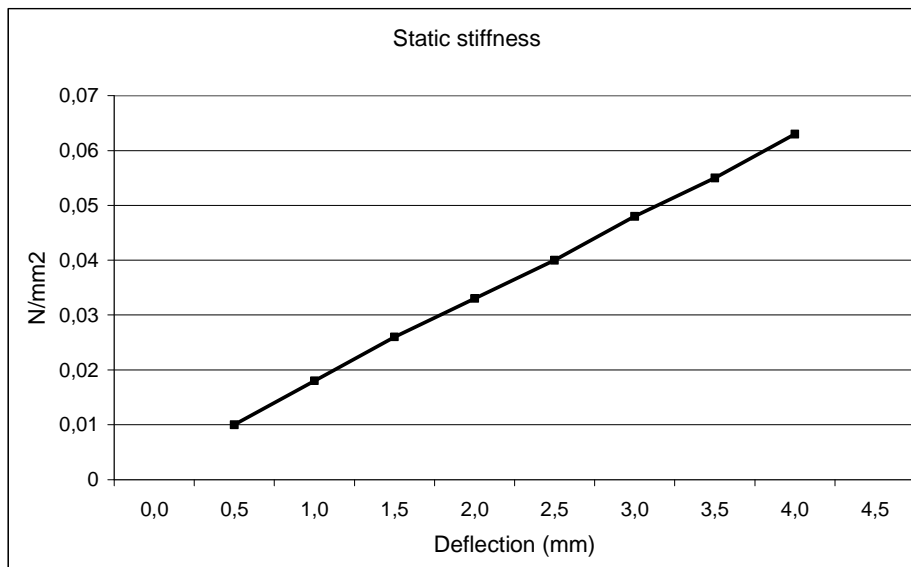

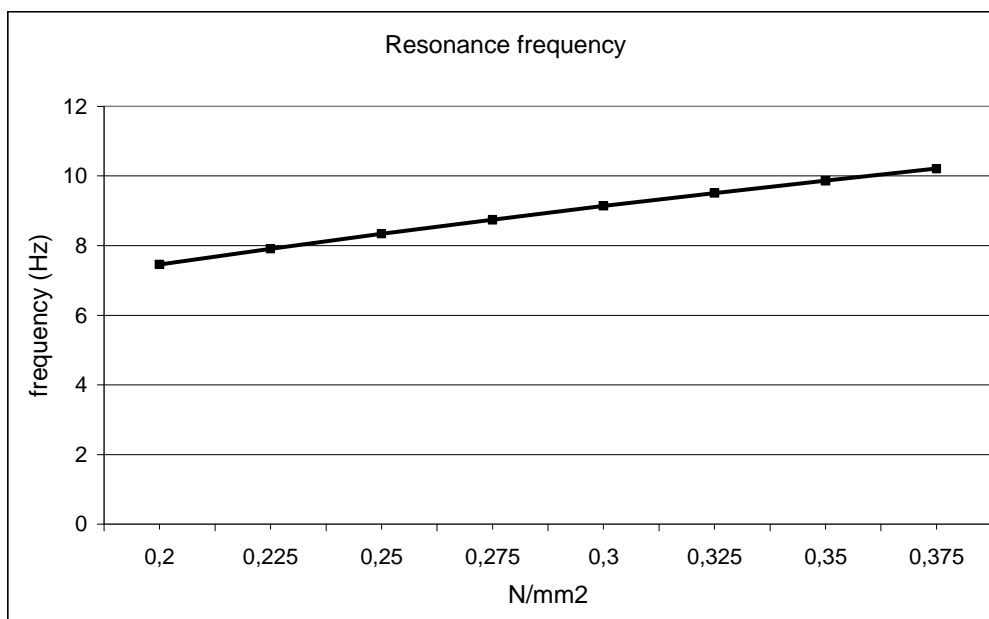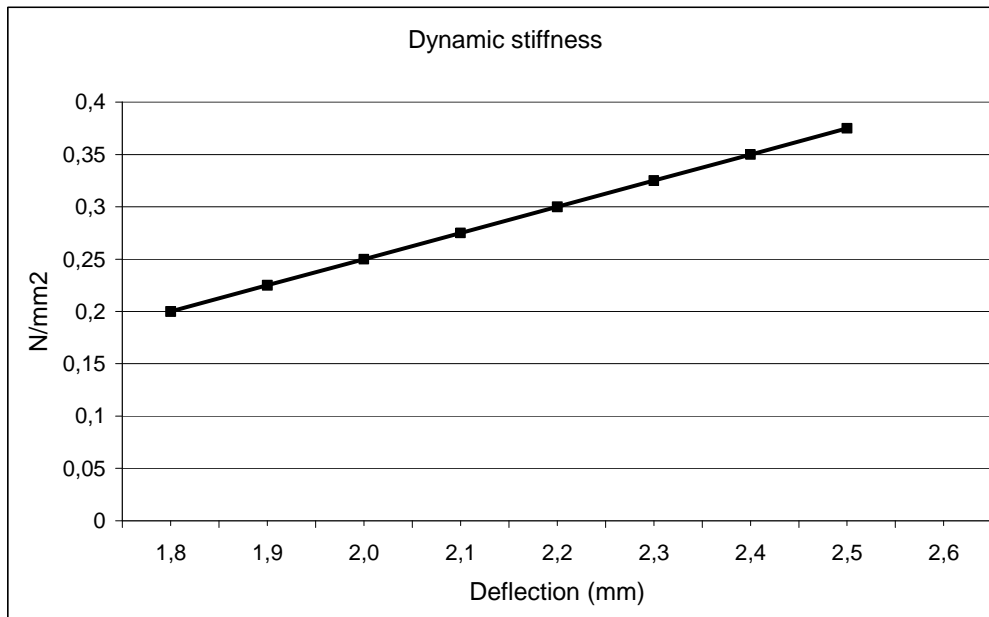

Information in this document and otherwise supplied to users is based on our general experiences and is given in good faith but, because of particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or implied with respect to such information. Specifications are subject to change without notice.

**CROXON, S. L.**

Polig. Ind. Majaravique, 27 B  
 41309 La Rinconada (Sevilla)  
 Telf.: +34 954 904 225  
 Fax: +34 954 906 676  
 E-mail: [croxon@croxon.es](mailto:croxon@croxon.es)  
 Web: [www.croxon.es](http://www.croxon.es)